


Exhaust Commander Lear Car2U Alternate Receiver Install Location

If you have a device already installed in the location underneath the stereo amplifier such as a PAL Ipod adapter you will need to locate the Exhaust Commander receiver in a different location.


Pull Down the plastic cover on the passenger that has the footwell interior light. This is the over that is below the glove bx and above the fuse panel area in the passenger footwell.

It is attached using two pressed in plastic “Tree” fasteners.


Pull down firmly on the plastic panel to dislodge the 2 plastic “tree” fasteners.

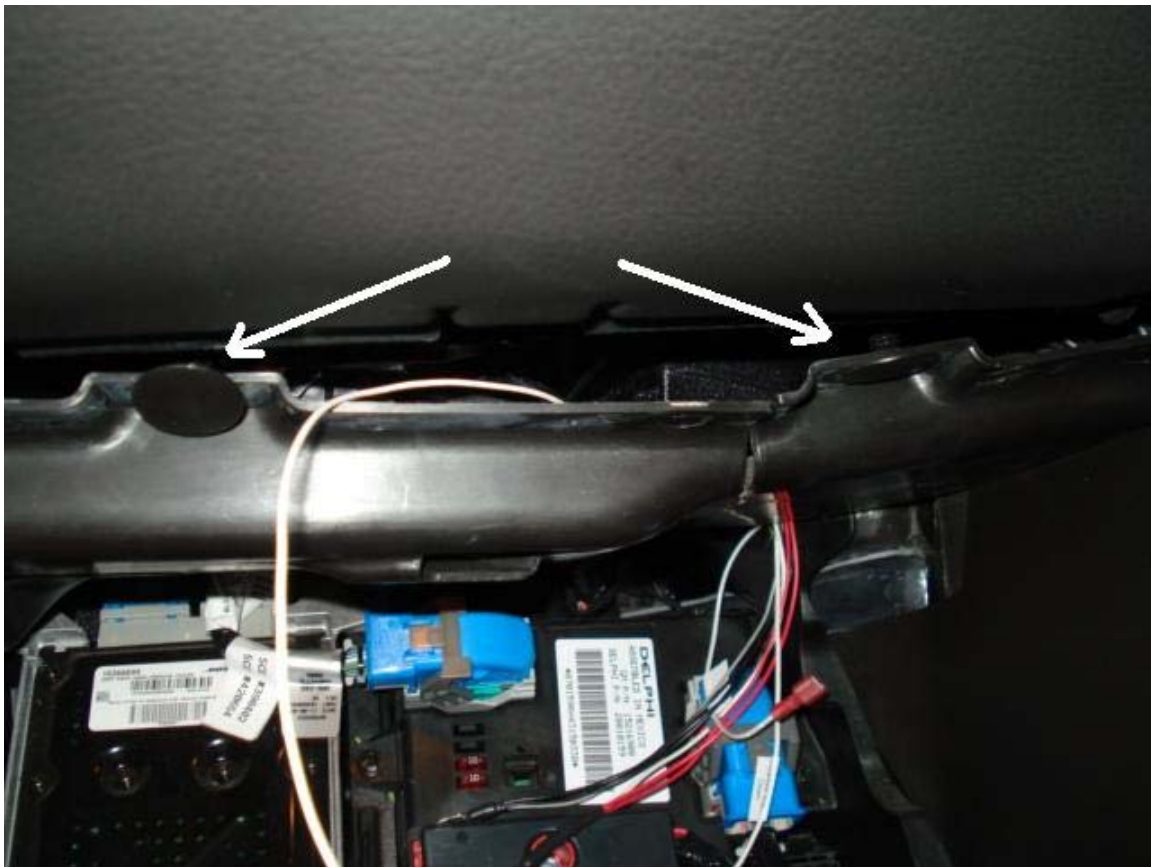


Locate the Exhaust Commander unit on the Plastic panel. It should be located to the right of the footwell light as seen in the photo.

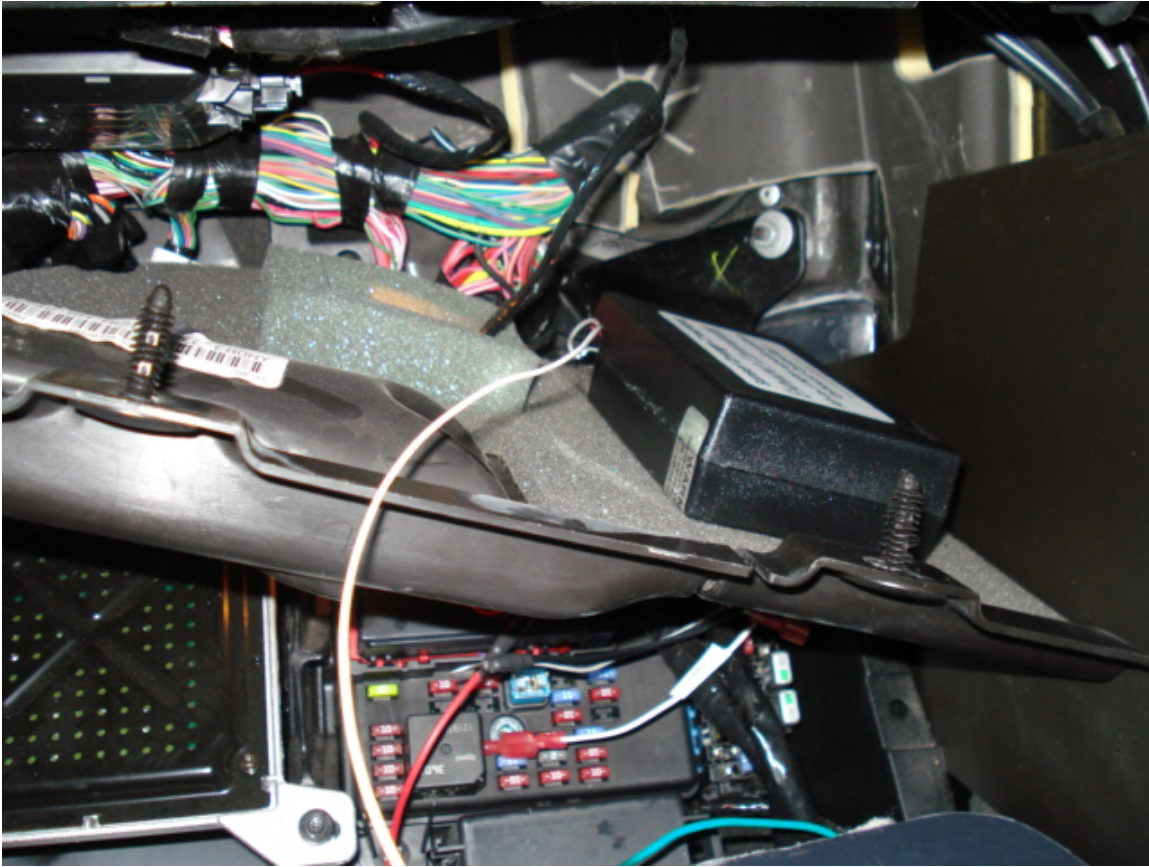

Route the wiring from the Exhaust Commander wiring out the back of the plastic panel and then re-install the plastic panel with the Exhaust commander unit located on top of it.

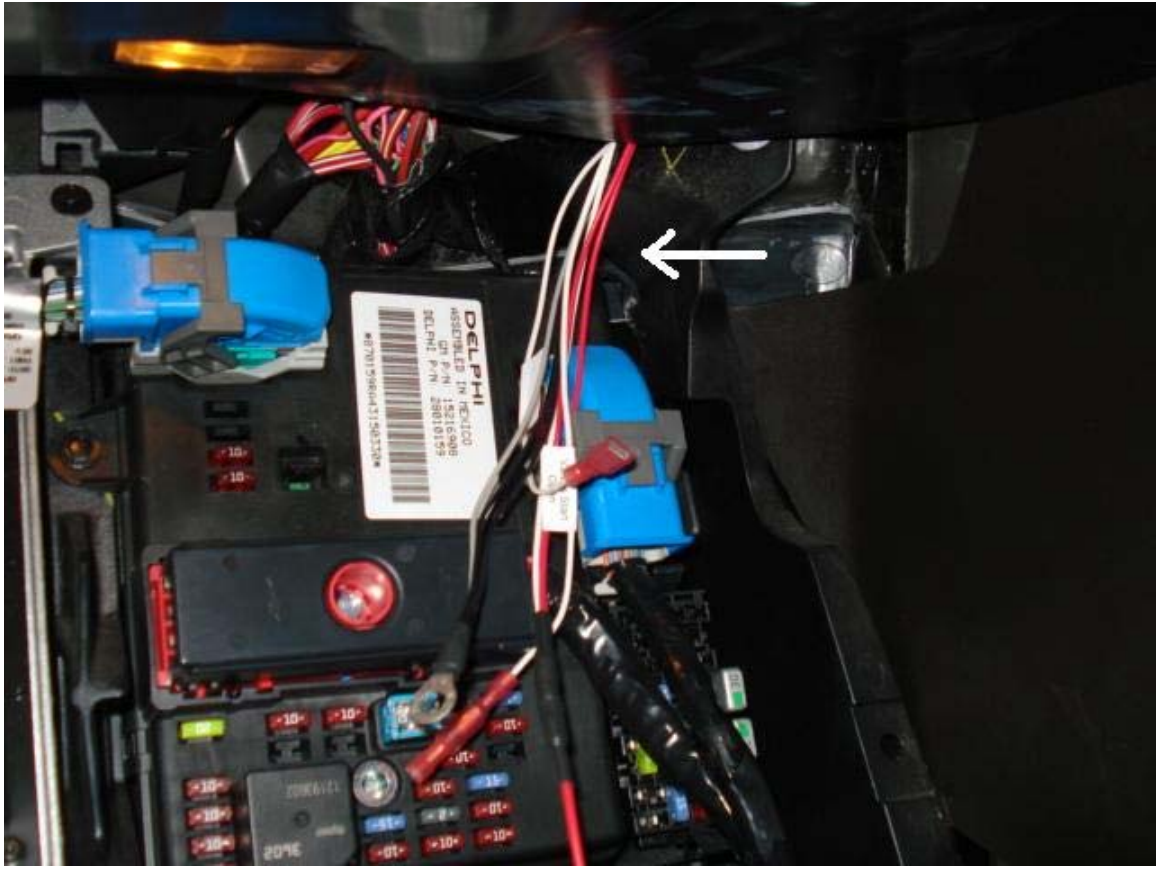

Use the top 7mm bolt of the Amplifier to secure the ground wire of the Exhaust Commander.

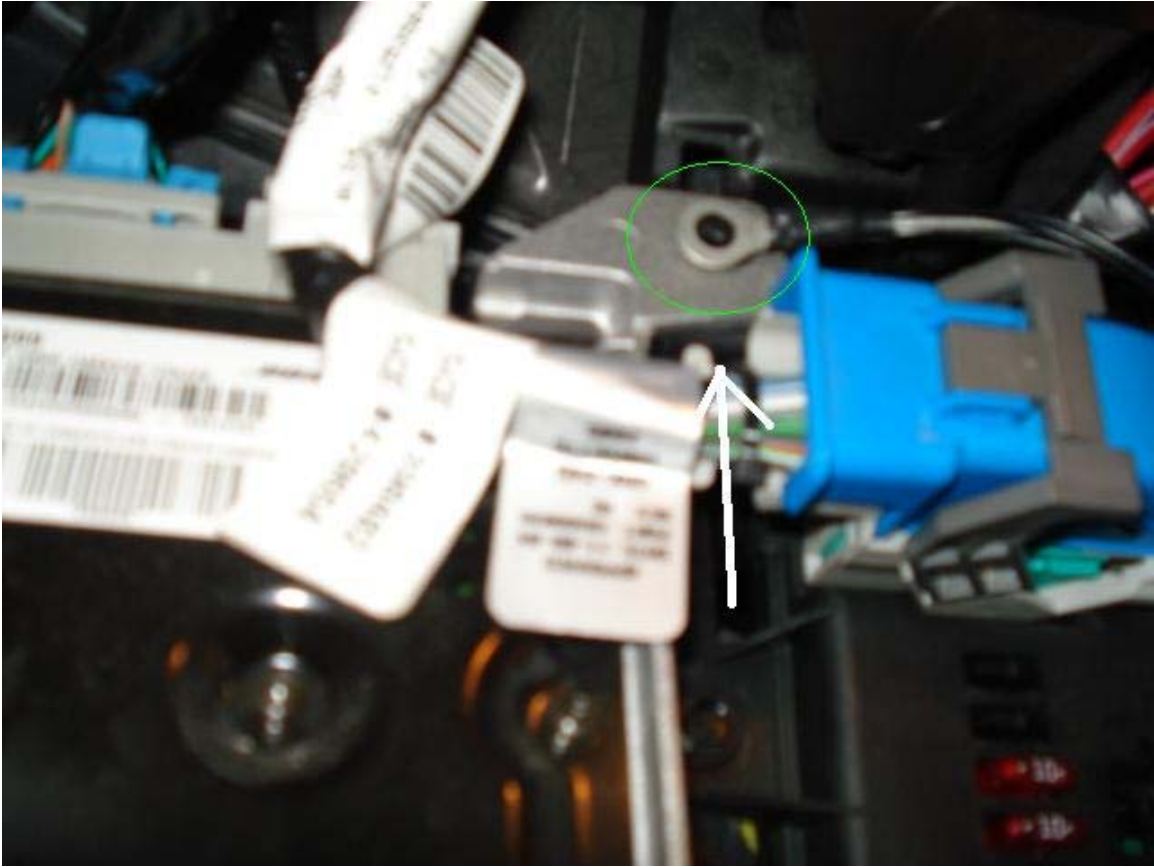

Continue the install as outlined in the Exhaust Commander Lear Car2u Instructions.